

UNIVERSAL FLATTENING BASE

TM12.60

Description

- A universal matting agent compatible with Colourthane C-Series and most Wattyl single pack enamels.

Product Characteristics

- Produces smooth, satin to matt finishes
- Excellent matting efficiency enables high or low satin finishes to be produced with minimal loss of opacity

Colours

- White

Application Instructions

- Agitate thoroughly with a flat-bladed stirrer before and during use
- Add required amount of Universal Flattening Base (refer to Gloss Reduction Chart) whilst stirring, stir thoroughly for 5 minutes (mechanical stirring is preferred)
- Always seal container of Universal Flattening Base when not in use to avoid drying out of the matting concentrate
- Gloss level obtained is influenced by choice of thinner, application conditions and film thickness
- Always check dried film gloss level on sample panel before final use
- When high levels of Universal Flattening Base is used, less or no thinner may be required. Check viscosity before thinning
- Refer to Product Data Sheet for the relevant topcoat for instruction for use and other properties

Safety Precautions

- Flammable. Avoid contact with heat and naked flame.
- Avoid contact with skin and eyes.
- Use gloves, mask and goggles during application.
- Provide adequate ventilation when using in confined spaces.
- This product is intended for use in industrial situations by professional applicators in accordance with the advice given on this sheet. All work involving the use and application of this product should be carried out in compliance with all relevant Health, Safety & Environmental standards and regulations and must not be used without reference to the safety data sheet (SDS).

Additional Data

COLOURTHANE C-SERIES

- Universal Flattening Base can be added to Colourthane C-Series to reduce gloss level
- Universal Flattening Base is added to the Colourthane C-Series Part A
- Maximum amount of Universal Flattening Base that can be added to Colourthane C-Series Part A is 30% of total Part A volume

Precautions

- Only add to recommended Wattyl topcoats
- Please test this product to determine if it is suitable for the required end-use
- For recommendations outside those contained in this data sheet, refer to Wattyl.

Product Compatibility

TOPCOATS


- All Purpose Enamel
- Agricultural Enamel
- Colourthane C-Series (colours)

Storage and Packaging

- Shelf life at least 12 months in an unopened container
- Product should be stored in a dry internal environment at between 5°C and 35°C.
- Packaging: 4 litre
- Product line: 1890

UNIVERSAL FLATTENING BASE

TM12.60

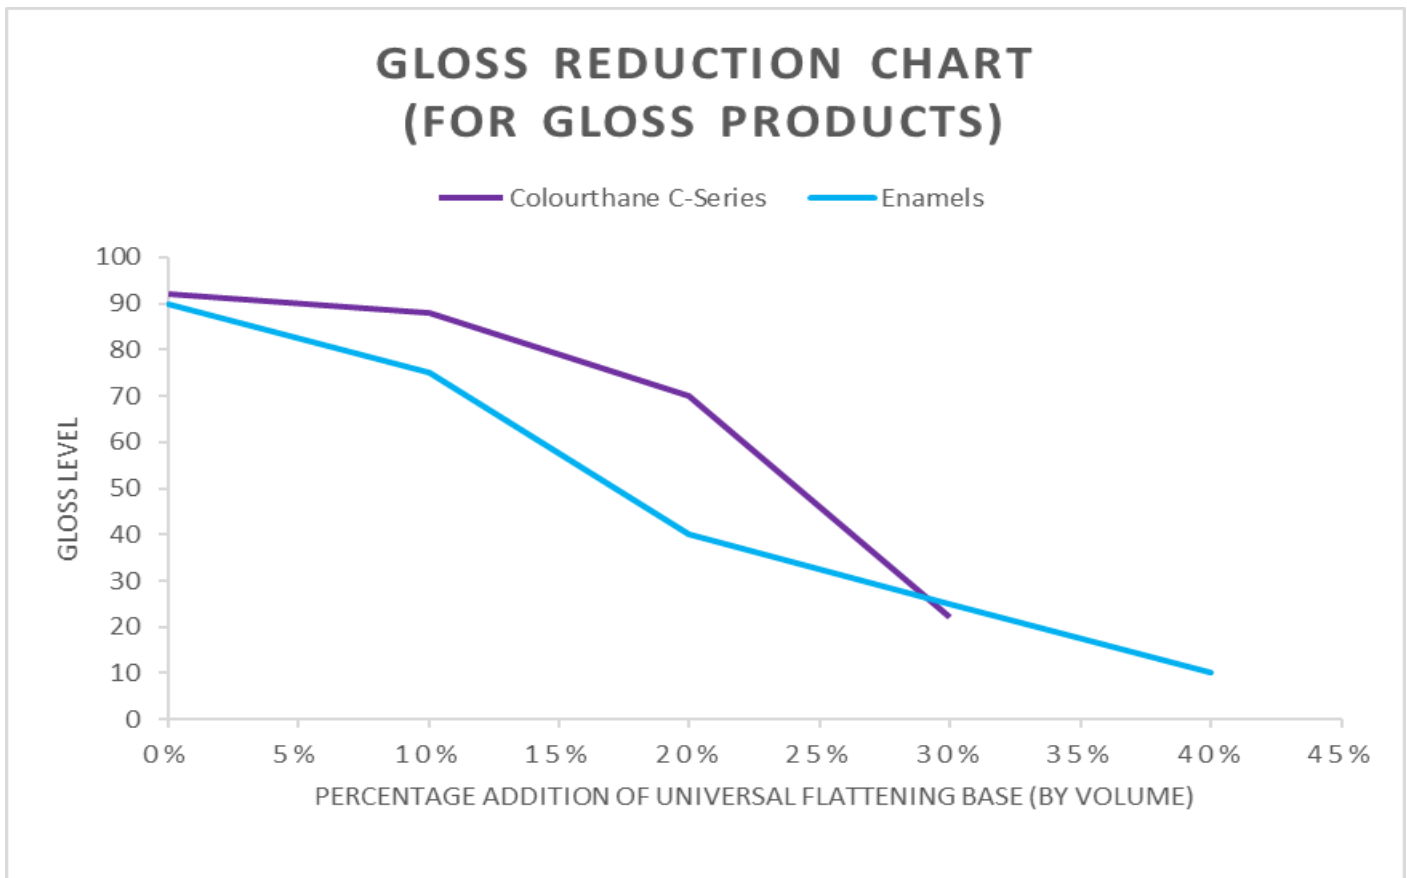

For the most up to date information, please visit our website at www.wattylpc.com.au, or contact us at Australia 132 101 (Australia) 0800 825 7727 (New Zealand).

1. This information, provided by Hempel (Wattyl) Australia Pty Ltd is important to ensure that the listed product(s) perform according to the stated application and uses and must be followed to meet Wattyl's warranties express and implied. Wattyl advises that you (a) review the Product Data Sheets (PDS) and Safety Data Sheets (SDS) before you use or handle the product; (b) ensure that the product be used only in accordance with the information provided by Wattyl and the product(s) be transported, stored and handled in accordance with the information on the SDS and relevant PDS; and (c) thoroughly test the product, using the recommended application method on a sample of intended substrate, before using the product.
2. The information in this PDS was prepared using information gathered during product development. While Wattyl endeavours to update this information and maintain the accuracy and currency of its contents, Wattyl does not warrant that the information provided is current when the product is used or is wholly comprehensive.
3. For all product and non-product related information, Wattyl recommends that you conduct such additional investigations as may be necessary to satisfy yourself of the accuracy, currency and comprehensiveness of the information on which you rely in using and handling the product. If you require further information please contact your nearest Wattyl office before using the product(s).
4. To the full extent permitted by law, Wattyl's liability for breach of a condition or warranty implied into the contract for sale between Wattyl and you by law is limited at Wattyl's election to: (a) the replacement of the product; or (b) payment of the cost of replacing the product. If coating rectification is required Wattyl's Technical Services shall be contacted prior to commencement. Trademarks are the property of Hempel (Wattyl) Australia Pty Ltd. (ABN 40 000 035 914)

Wattyl Protective Coatings is part of the Hempel Group, a world leading supplier of trusted coating solutions. Hempel is a global company with strong values, working with customers in the decorative, marine, infrastructure and energy industries. Our purpose is to shape a brighter future with sustainable coating solutions, and with more than 100 years of protecting some of our customer's most valuable assets, we aim to earn their trust every day. The Hempel Group is proudly owned by the Hempel Foundation.

1